



Weights

Stainless Steel Laterals and Wyes

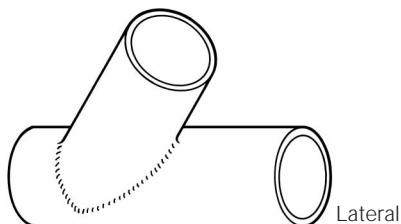

Lateral



Wye

Laterals

Outside Diameter	Wall Thickness: Listed in Inches with Corresponding Manufacturer's Standard Gauge													
	16	14	12	11	10	.165	.187	.218	.250	.312	.375	.500	.625	.750
4	5.0	6.3	8.7	9.9	11.1	13.5	15.2	17.6	20.0					
4 1/2	5.6	7.0	9.7	11.0	12.2	15.0	16.9	19.5	22.2					
5	7.0	8.8	12.2	13.9	15.5	18.9	21.4	24.7	28.2	34.7				
5 9/16	7.8	9.6	13.3	15.2	16.9	20.7	23.4	27.1	30.9	38.2				
6	8.8	11.0	15.3	17.4	19.4	23.8	27.0	31.2	35.5	43.9				
6 5/8	9.5	11.9	16.6	18.9	21.1	25.8	29.2	33.8	38.6	47.8				
8	14.0	17.5	24.4	27.9	31.1	38.1	43.2	50.0	57.1	70.8	84.2			
8 5/8	14.9	18.6	25.9	29.6	32.9	40.4	45.9	53.1	60.6	75.2	89.6			
10	20.1	25.1	35.1	40.0	44.6	54.8	62.2	72.0	82.0	102	122			
10 3/4	21.3	26.5	37.0	42.3	47.2	57.9	65.8	76.1	87.0	108	129			
12	28.6	35.7	49.8	56.8	63.4	77.9	88.5	102	117	146	174			
12 3/4	29.9	37.3	52.1	59.5	66.4	81.5	92.7	107	123	153	182			
14		45.2	63.1	72.0	80.4	98.7	112	130	149	185	221			
16		56.8	79.3	90.6	101	124	141	164	187	233	279	368		
18		67.2	93.9	107	120	147	167	194	222	276	331	438	543	
20			114	131	146	179	203	236	270	337	403	534	663	791
24			157	179	200	245	279	324	371	462	553	734	912	1088
30			232	265	296	364	414	480	550	686	821	1090	1357	1622

Wyes

Outside Diameter	Wall Thickness: Listed in Inches with Corresponding Manufacturer's Standard Gauge													
	16	14	12	11	10	.165	.187	.218	.250	.312	.375	.500	.625	.750
4	2.9	3.7	5.1	5.8	6.5	7.9	8.9	10.3	11.7					
4 1/2	3.2	4.0	5.6	6.4	7.1	8.7	9.8	11.4	13.0					
5	4.2	5.2	7.3	8.3	9.3	11.3	12.8	14.8	16.9	20.8				
5 9/16	4.6	5.7	8.0	9.1	10.1	12.4	14.0	16.2	18.5	22.8				
6	5.2	6.5	9.0	10.3	11.5	14.0	15.9	18.4	21.0	25.9				
6 5/8	5.6	7.0	9.8	11.1	12.4	15.2	17.2	19.9	22.7	28.1				
8	7.7	9.7	13.5	15.4	17.1	21.0	23.8	27.6	31.5	39.0	46.5			
8 5/8	8.2	10.2	14.2	16.3	18.1	22.2	25.1	29.2	33.3	41.3	49.3			
10	11.5	14.4	20.0	22.9	25.5	31.3	35.4	41.1	47.0	58.3	69.6			
10 3/4	12.1	15.1	21.1	24.1	26.9	33.0	37.3	43.4	49.6	61.5	73.5			
12	14.7	18.3	25.6	29.2	32.6	40.1	45.3	52.7	60.3	74.8	89.4			
12 3/4	15.3	19.1	26.7	30.5	34.0	41.8	47.3	55.0	62.9	78.1	93.4			
14		24.6	34.4	39.2	43.8	53.8	60.8	70.8	81.0	101	120			
16		29.6	41.3	47.2	52.7	64.7	73.2	85.2	97.5	121	145	192		
18		36.2	50.5	57.7	64.4	79.2	89.6	104	119	148	178	235	292	
20			61.6	70.3	78.5	96.5	109	127	146	181	217	287	357	426
24			89.2	102	114	140	158	184	211	263	315	418	520	620
30			122	139	155	191	216	252	288	359	431	572	712	850

All weights are in pounds based on a metal density of .29 lb/in³